



FIG. 615
FIG. 620

C-Clamp w/ Locknut
C-Clamp Retaining Strap

SERVICE: For attaching to I-beams and wide flange beams where thickness does not exceed 3/4". Flange thickness may not exceed 5/8" when clamp is used with a retaining strap.

MATERIAL: Carbon Steel or 304/316 Stainless Steel

FINISH: Black or Electro-Galvanized

STANDARDS: MSS SP-58 Type 23, FS WW-H-171E Type 23

APPROVALS: FM (FIG. #615 with FIG. #620)

ORDERING: Specify figure number, rod size, material and finish.

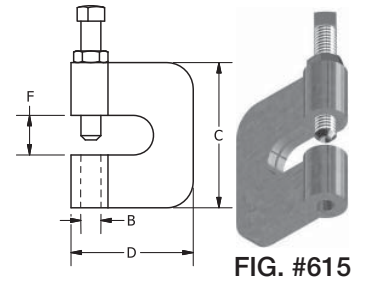


FIG. #	C-CLAMP	ROD SIZE B	C	D	F	MAX PIPE SIZE	WEIGHT PER EACH, LBS.	MAX. REC. LOAD, LBS.
615	With Lock Nut	3/8	2 3/8	2 3/8	3/4	4	0.40	400
615	With Lock Nut	1/2	2 3/8	2 3/8	3/4	4	0.40	500
615	With Lock Nut	5/8	2 3/8	2 5/16	3/4	5	0.60	550
615	With Lock Nut	3/4	2 3/8	2 5/16	3/4	6	0.68	630

FIG. #620 L	WEIGHT PER EACH, LBS.
4 1/2	0.22
6	0.30
8	0.36
10	0.44
12	0.48
14	0.66

