



**FIG. 705**

**Medium Welded Steel Bracket**


**SERVICE:** For the support of loads up to 1,500 Lbs. Constructed of facing angle irons with 1" space between. This bracket provides maximum lateral adjustment when carrying or suspending pipe.

**MATERIAL:** Carbon Steel or 304/316 Stainless Steel

**FINISH:** Black or Hot-Dip Galvanized

**STANDARDS:** MSS SP-58 Type 32, FS WW-H-171E Type 33

**ORDERING:** Specify figure number, size, material and finish.

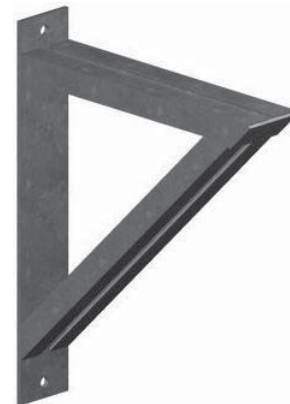

CARBON STEEL										
SIZE NO.	C-C	A	E	H	B	L	ANGLE SIZE S	W	WEIGHT EACH, LBS.	MAX. REC. LOAD, LBS.
0	15½	12	2½	13/16	1¼	18	1½ x 1½ x 3/16	4	15.67	1500
1	21½	18	2½	13/16	1¼	24	1¾ x 1¾ x 3/16	4½	25.90	1500
2	27½	24	2½	13/16	1¼	30	2 x 2 x ¼	5	44.87	1500

STAINLESS STEEL										
SIZE NO.	C-C	A	E	H	B	L	ANGLE SIZE S	W	WEIGHT EACH, LBS.	MAX. REC. LOAD, LBS.
0	15½	12	2½	13/16	1¼	18	1½ x 1½ x 3/16	4	16.50	1500
1	21½	18	2½	13/16	1¼	24	2 x 2 x ¼	5	35.00	1500
2	27½	24	2½	13/16	1¼	30	2 x 2 x ¼	5	46.00	1500

**NOTE:** Stainless steel dimensions may change due to availability of stainless steel angle.

