



FIG. 850

Bang-It®+

SERVICE: To provide a pre-positioned hanger rod attachment to the underside of concrete slabs on metal form decks. Used as a cast-in-place concrete anchor in 3,000 psi minimum compressive strength normal and lightweight, cracked and uncracked concrete loaded by static and occasional tensile and shear forces from piping or similar services.



MATERIAL: Carbon Steel meeting AISI 1008 and Engineered Plastic (Polypropylene)

FINISH: Electro-Galvanized meeting ASTM B633

MAX TEMP: 200°F

APPROVALS: FM, UL, ICC-ES ESR-3657, IBC 2018

ORDERING: Specify figure number and anchor size.

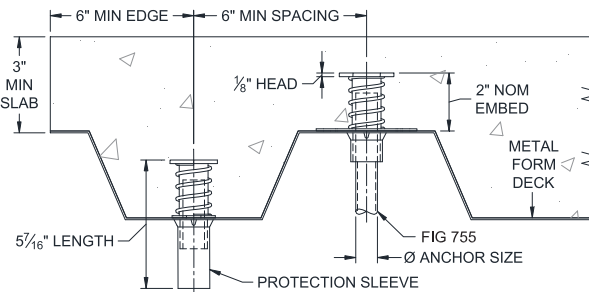

ANCHOR SIZE	COLOR CODE	WEIGHT EACH, LBS.
3/8	GREEN	0.408
1/2	YELLOW	0.384
5/8	RED	0.759
3/4	PURPLE	0.715

NOTE: Refer to Dewalt Anchors & Fasteners, Bang-It®+ for maximum recommended loads and additional details.