
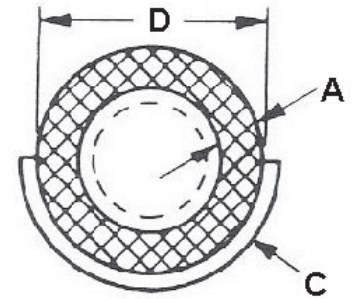


FIG. 307

MSS PIPE COVERING PROTECTION SHIELD

MATERIAL: Carbon steel or 304/316 stainless steel.
FINISH: Galvanized.
SERVICE: For use on the outside of foam or fiberglass insulation.
ORDERING: Specify shield size and figure number.
APPROVALS: MSS SP-58 & SP-69 TYPE 40
 FS WW-H171E TYPE 41

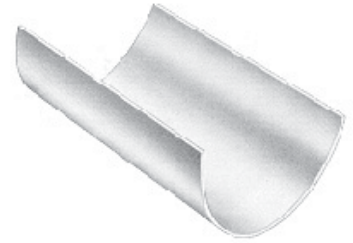

SIZE NO. SHIELD	B LENGTH	C STOCK SIZE	D DIA.	HANGER SIZE	WEIGHT EACH, LBS.
0	12	18 ga.	1 ⁷ / ₈	1 ¹ / ₂	.53
1	12	18 ga.	2 ³ / ₈	2	.68
2	12	18 ga.	2 ⁷ / ₈	2 ¹ / ₂	.82
3	12	18 ga.	3 ¹ / ₂	3	1.02
4	12	18 ga.	4	3 ¹ / ₂	1.13
5	12	18 ga.	4 ¹ / ₂	4	1.26
6	12	18 ga.	5	5	1.42
7	12	18 ga.	5 ⁹ / ₁₆	5	1.58
8	12	16 ga.	6 ⁵ / ₈	6	2.33
9	12	16 ga.	7 ⁵ / ₈	7	2.66
10	12	16 ga.	8 ⁵ / ₈	8	3.00
11	18	16 ga.	7 ⁵ / ₈	7	3.99
12	18	16 ga.	8 ⁵ / ₈	8	4.49
13	18	16 ga.	9 ⁵ / ₈	10	5.03
14	18	16 ga.	10 ³ / ₄	10	5.62
15	24	14 ga.	11 ³ / ₄	12	10.12
16	24	14 ga.	12 ³ / ₄	12	10.94
17	24	14 ga.	14	14	12.03
18	24	14 ga.	15	16	12.92
19	24	14 ga.	16	16	13.74
20	24	14 ga.	17	18	14.63
21	24	12 ga.	18	18	21.33
22	24	12 ga.	19	20	22.56
23	24	12 ga.	20	20	23.79
24	24	12 ga.	21	24	24.92
25	24	12 ga.	22	24	26.15
26	24	12 ga.	23	24	27.37
27	24	12 ga.	24	24	28.51
28	24	12 ga.	26	30	30.87
29	24	12 ga.	27	30	32.09
30	24	12 ga.	28	30	33.22